FARIZON

Linkedin
@Farizon Auto

YouTube
@farizonauto

More About SV

FARIZON



FARIZON SV

VANGUARDING THE WAY

SUPER MILEAGE | SUPER SHIELD | SUPER CARE | SUPER AESTHETICS | SUPER CAPACITY

SUPER MILEAGE

- Industry's first CTP-S battery
- Maximum 2C charging efficiency
- Maximum WLTP combined range of 384 km (100.46 kWh battery)
- Charging from 20% to 80% in just 18 minutes (83 kWh battery)
- Integrated electric drive system with the industry's strongest power output
- Ultra-low energy consumption and strong power

GREATER ENDURANCE AT YOUR DISPOSAL

02

SUPER CAPACITY

- Optional 270° rear door
- Low-roof 6.95 m^3, high-roof 13 m^3
- 520mm cargo platform height
- 160mm ultra-thin battery, short front overhang
- Advanced compartment utilization rate
- Hidden B-pillar design, facilitating easier loading/unloading



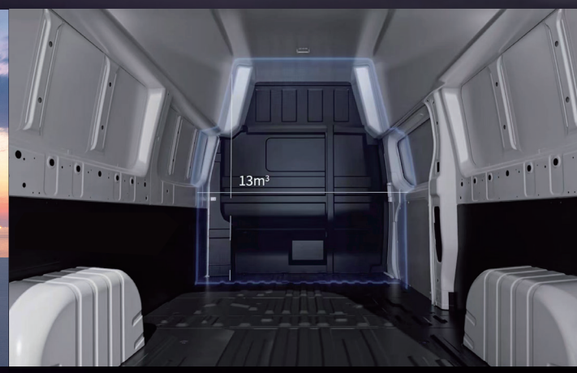

GREATER PROFITABILITY



03

SUPER SHIELD

- Battery packs developed in line with the highest functional safety standard of ASIL-D
- Over 70% high-strength steel usage, with the top pressure resistance up to 45000 N
- 2.8 million kilometers of real-life scenario testing
- 30 intelligent safety features equipped, including adaptive cruise control (ACC), Urban/Highway Intelligent Cruise Control (ICC), and advanced driver distraction warning (ADDW)

HIGH-TECH SAFETY

EURO NCAP

★★★★★

Test 2025

04

SUPER CARE

- Spare parts system, network system, talents and services, providing"Express" services across all the three systems
- Long warranty covering both vehicle and battery

MORE SERVICE GUARANTEE

05

SUPER AESTHETICS

- 4 exterior color options
- Mirror-like body design, reflecting surrounding scenery
- Electrified original styling with highly recognizable full LED headlights
- 0.29 Cd aerodynamic drag

MORE MODERN AESTHETIC EXPERIENCE



	VERSION		FWD-5M-LHD/RHD		FWD-5.5M-LHD/RHD			FWD-6M-LHD/RHD	
BASIC PARAMETERS	Body Color		● White ○ Cyan/Black/Grey						
	Seats		● 2 ○ 3						
	Dimensions(mm)		4990x1980x1980	4990x1980x2180	5490x1980x1980	5490x1980x2180	5490x1980x2500	5995x1980x2500	
	Wheelbase(mm)		3100	3100	3600	3600	3600	3850	
	GVW(kg)		3500						
	Curb Weight(kg)		2210	2245	2265	2300	2340	2415	2525
	Minimum Ground Clearance(mm)		150						
	Volume(m^3)		6.95	7.92	8.25	9.39	11.22	13	
	Drive Model	4x2	FWD						
	Front/Rear Brake		Disc						
	Steering		4-way Adjustment/R-EPS						
	Front/Rear Suspension		Double Wishbone/Trailing-arm independent suspension		Double Wishbone Independent Suspension/Leaf Spring(2 pieces)				
	WLTP Combine Range(km)		384	338	351	340	334	320	375
	Battery Brand		CATL						
	Battery Capacity(kWh)		83.66	83.66	83.66	83.66	83.66	83.66	100.46
	Max. Speed(km/h)		135						
	Battery Heating/Cooling Device		Liquid Heating/Liquid Cooling						
	Motor	Type	Permanent Magnet Synchronous						
		Max. Torque(N.m)	130/330						
		Max. Power(kW)	66/170						
	Discharge		V2L(3.3kW)						
	Driving Mode		Economic/Comfort/Sport/Camping						
EXTERIOR & INTERIOR	Front Headlights		●						
	LED Daytime Running Lights		●						
	Front Fog Lamp + Exalted Brake Lght		●						
	Front Window	Power + One Click Control	●						
	Exterior Mirror	Electric Adjusting + Electric Heating and Defrosting	●						
	Rear Compartment Floor		● No Carpet ○ PVC ○ All Aluminium(LHD Only)						
	Anchor Point		●						
BODY	Rear Door	180°	●						
SECURITY CONFIGURATION	Airbag		●						
	Front & Rear Parking Radar		●						
	ABS+EBD/CBC		●						
COMFORT & CONVINIENCE	12.3inch MP5 + FM/AM + DAB		●						
	Android Auto & Carplay		●						
	Smart Key		●						
	Car Searching	Whistle/Double Flash	●						
	One Clip Start		●						
	Automatic Air conditioning		●						
	Seats	Ventilation + Heating	●						
	Bluetooth Music		●						
	Parking Brake	EPB	●						
		Auto Hold	●						
OPTIONAL PACKAGE	Package 1		10kW Upper Load Electrical Access, 220V(3.3kW) (I/E/F/G), Weight Monitoring						
	Package 2		270° Rear Door, Non-woven Fabric + No Partition (No Partition Can Be Selected Independently without This Option Package), Wheel Decorative Cover, Boneless Wiper						
	Package 3		6-way Manual Adjustment + Lumbar, Automatic Sensing Wiper, Defrosting and Defogging Vents						
REMARK			●: Standard; ○: Optional; -: None						